



SA60

Standalone Access Control Terminal With RFID & Password Authentication

ZKTeco's SA60 standalone access control terminal provides comprehensive security management with RFID and PIN code authentication technology.

SA60 accommodates up to 2,000 users across three flexible authentication modes: card only, authentication only, and card + PIN code authentication. Featuring intuitive user management capabilities, administrators can easily add or remove access credentials directly on the terminal.

Available in black and white color, the SA60 seamlessly integrates into commercial and residential security installation while providing reliable access control.

Features


- Password length: 4 to 6 digits
- RFID: 125kHz ID Card (standard) / 13.56MHz IC card (optional)
- High user capacity: Maximum 2,000 users and 2,000 passwords, accommodating extensive access control requirements

Specifications

Model	SA60
Authentication Method	Card / Password / Card + Password (4 to 6 digits, Physical Keypad)
User Capacity	2,000
Card Capacity	2,000
Card Type	ID Card @ 125kHz (Standard) IC Card @ 13.56MHz (Optional)
Verification Speed	<0.16s @ Card
Recognition Distance	<5cm @ Card
Communication	Electric Lock*1, Door Sensor*1, Exit Button*1, Doorbell*1

Standard Functions	Access Control, Buzzer, Multiple Verification Methods, LED status indicators: Flashing Green + 1 Beep: Verification successful Flashing Blue: Standby Flashing Blue*2 + 3 Beeps: Verification Failed Flashing Blue*4 + Flashing Green + 5 Beeps: Factory Restore
Power Supply	DC 12V
Operating Temperature	-20°C to 60°C
Operating Humidity	20% to 80% RH (non-condensing)
Dimensions (L*W*H)	103.5mm x 86mm x 20mm
Gross Weight	0.15kg
Net Weight	0.1kg
Installation	Wall-mount
Housing Material	ABS
Certifications	ISO9001, ISO14001

Configuration

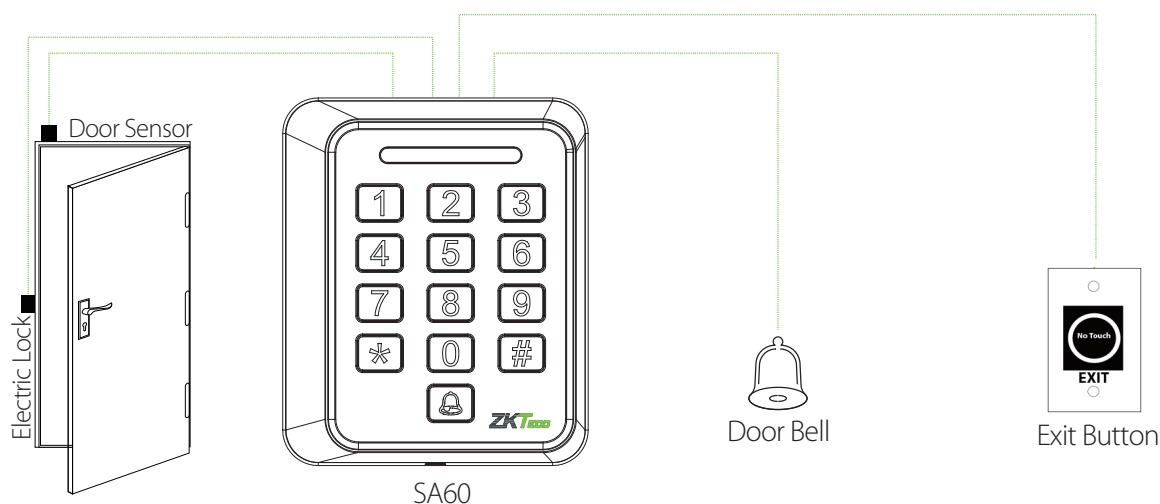

Dimensions (mm)

