

Installation Guide

SensePalm T1 & SensePalm T2

Version: 1.0

Installation Environment

Please refer to the following recommendations for installation.



INSTALL INDOORS
ONLY



AVOID INSTALLATION
NEAR
GLASS WINDOWS



AVOID DIRECT
SUNLIGHT
AND EXPOSURE




AVOID USE OF ANY
HEAT SOURCE
NEAR THE DEVICE

Device Installation


- Install on the wall (no backplate)

- ① Stick the mounting template sticker to the wall and drill holes according to the mounting template sticker.
- ② Install the wall mounting screws into the holes (**Note:** The screw head should protrude **4~6 mm**).
- ③ Mount the device onto the screws from top to bottom.


①




②



③




④




- Install on the wall (with backplate) ★

- ① Stick the mounting template sticker to the wall and drill holes according to the mounting template sticker.
- ② Fix the backplate on the wall using wall mounting screws.
- ③ Attach the device to the backplate.
- ④ Fasten the device to the backplate with a security screw.


1




2



3



4




Note:

- 1) Features and parameters with ★ mark are not available in all devices.
- 2) You can only choose one between the backplate and the backup battery.


● Install on the wall (with backup battery) ★

- ① Stick the mounting template sticker to the wall and drill holes according to the mounting template sticker.
- ② Connect the power cable to the power interface on the back of the backup battery backplate, then fix the backup battery backplate on the wall using wall mounting screws.
- ③ Connect the backup battery's power cable to the device's power interface and attach the device to the backup battery backplate.
- ④ Fasten the device to the backup battery backplate with a security screw.


1




2



3




4




- Install on the desktop (with backplate) ★

- ① Fix the backplate to the Rots-4 desktop stand using two screws.
- ② Attach the device to the backplate.
- ③ Fasten the device to the backplate with a security screw.


①



②




③




- **Install on the desktop (with backup battery) ★**

- ① Fix the backup battery backplate to the Rots-4 desktop stand using two screws.
- ② Connect the backup battery's power cable to the device's power interface and attach the device to the backup battery backplate.
- ③ Fasten the device to the backup battery backplate with a security screw.

①

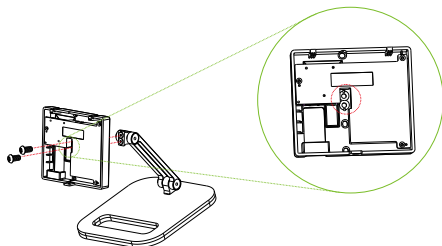


②




③



Power Connection



Power Interface (Type-C)



(with backup battery)★



ZKTeco Industrial Park, No. 32, Industrial Road,
Tangxia Town, Dongguan, China.

Phone : +86 769 - 82109991

Fax : +86 755 - 89602394

www.zkteco.com

